


EX5100 PEEL BAR MODIFICATION

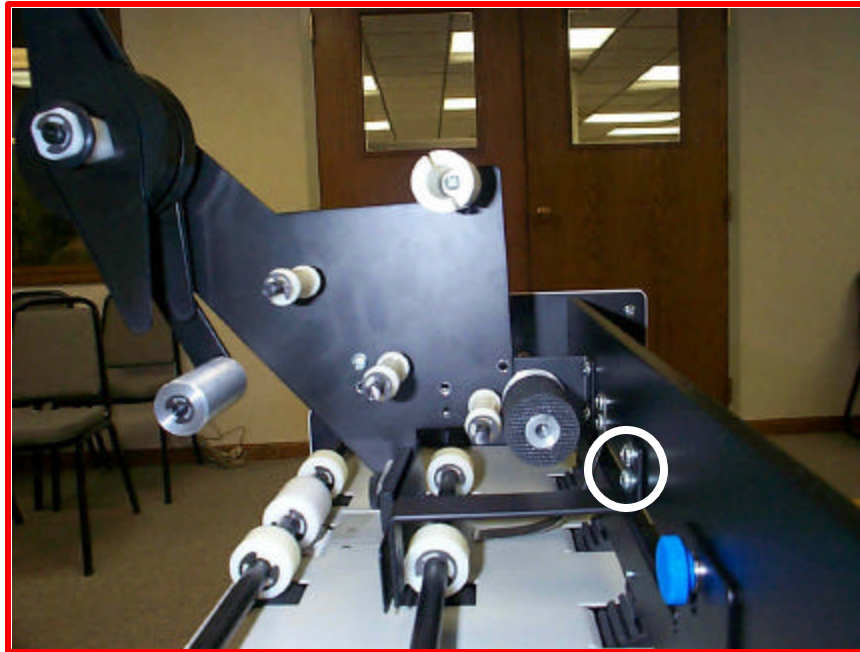

When running some translucent tabs, it may be necessary to decrease the amount of distance between the tab sensor and the peel bar.

Follow the steps below to perform:

1. Remove the two Phillips head screws and star washers from the mounting bracket.
2. Line up the two plastic spacers on the back of each screw.
3. Put the Phillips head screws back into the feed frame.
4. Reassemble the parts back onto the machine.

Test the machine.